


Universal Elevator Type 44G

Technical data



Applications:	Powder, granulates, pellets, grain & seeds
Execution:	Design: closed w/inspection doors Material: mild steel, galvanized
Buckets:	Type: standard / FRB Size: 4,4 liters Material: PP-Glass-AS
Chains:	Material: mild steel / stainless steel
Chain tension:	Semi-automatic / automatically pneumatic operated (optional)
Intermediate outlet(s):	Pneumatically operated (optional)
Inlet, feeding system:	Simatek Drum Feeder, type CBFS / Vibrating Feeder
Overload protection:	Electronic

Capacity

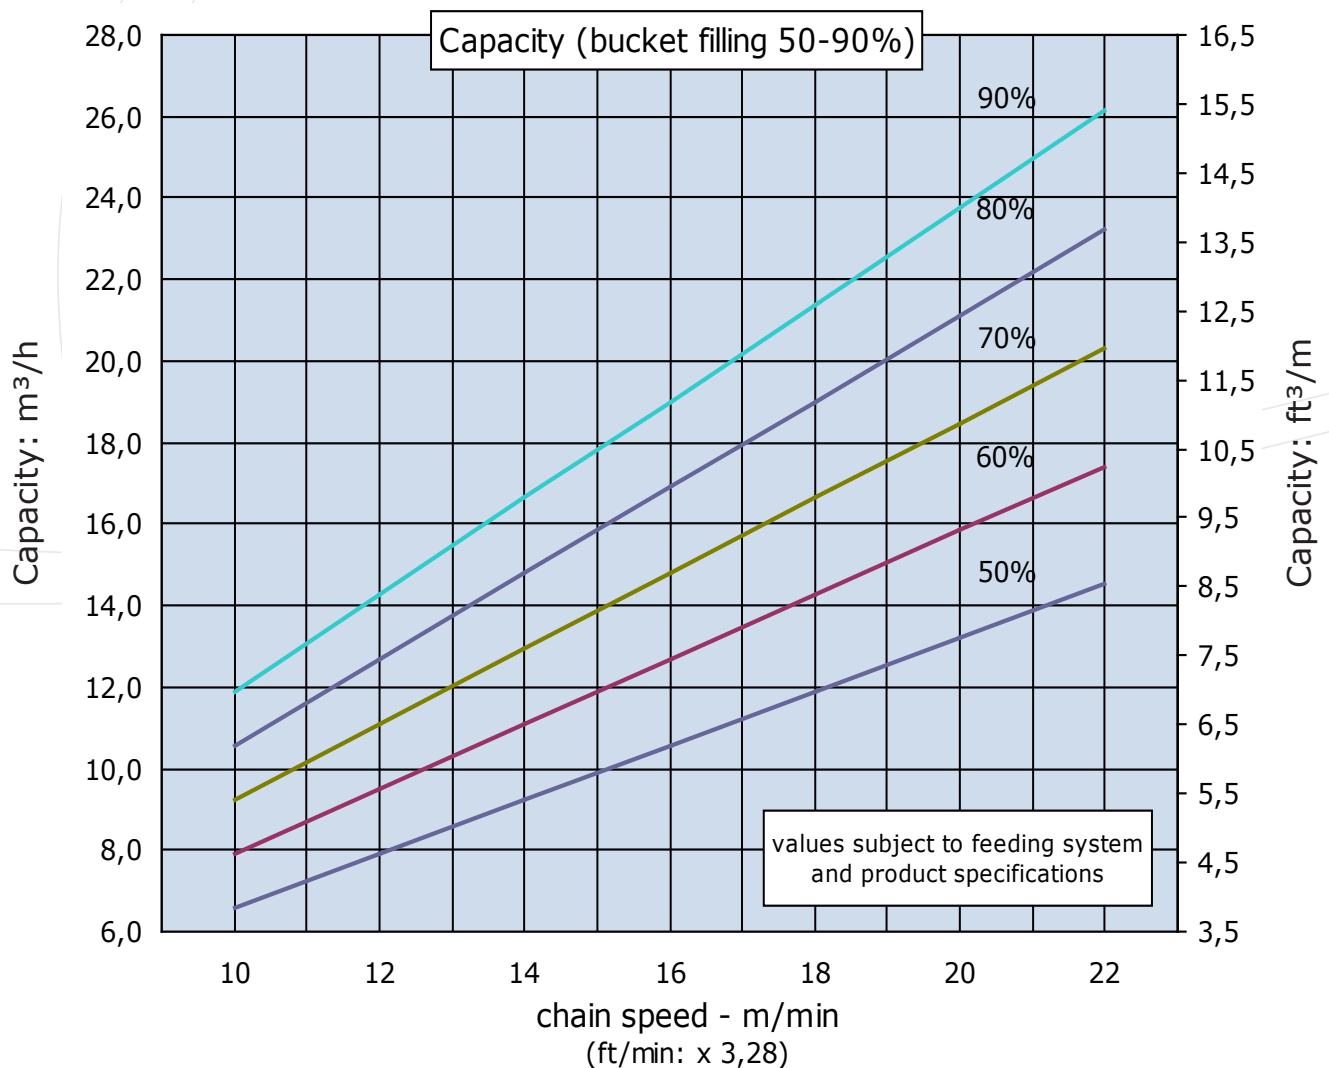

Universal Elevator Type 44G

Measurements

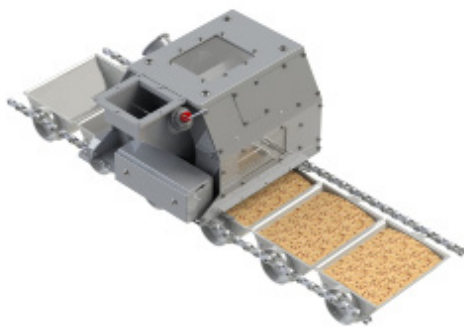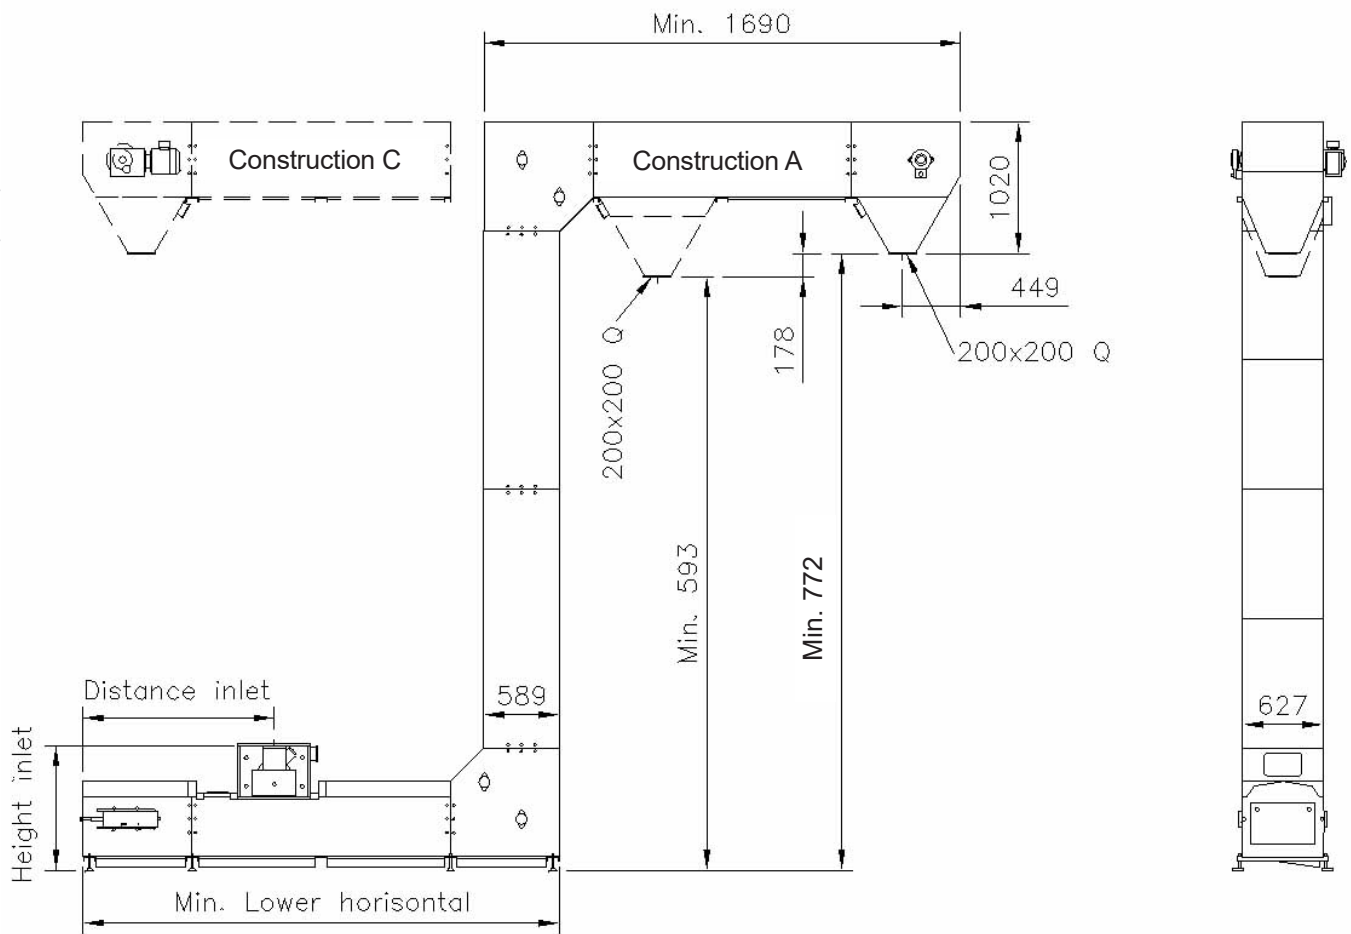

Drum feeder
CBFS (Continuous Batch Feeding System)
 for most free flowing products.
 Filling degree up to 95%



Vibrating feeder
 Traditional gentle feeding system
 for most product types.
 Filling degree up to 65%

