


Universal Elevator Type 33E

Technical data


Applications:	Powder, granulates, pellets, grain & seeds
Execution:	Design: Closed w/inspection doors / open construction Material: Mild steel w/powder coating / stainless steel
Buckets:	Type: Standard / Buckets without overlap Size: 3,2 liters Material: PP / PP-Detectable / PP-Glass / PP-Glass-AS / PA / stainless steel
Chains:	Material: Mild steel / stainless steel / lubrication free
Chain tension:	Automatic, pneumatically operated w/local control
Intermediate outlet(s):	Pneumatically operated
Inlet, feeding system:	Simatek Drum Feeder / Vibrating Feeder
Overload protection:	Electronic
Noise emission declaration:	Below 70 dB(A) at 1m distance, without product (Lpa re. 20μPa)

Capacity

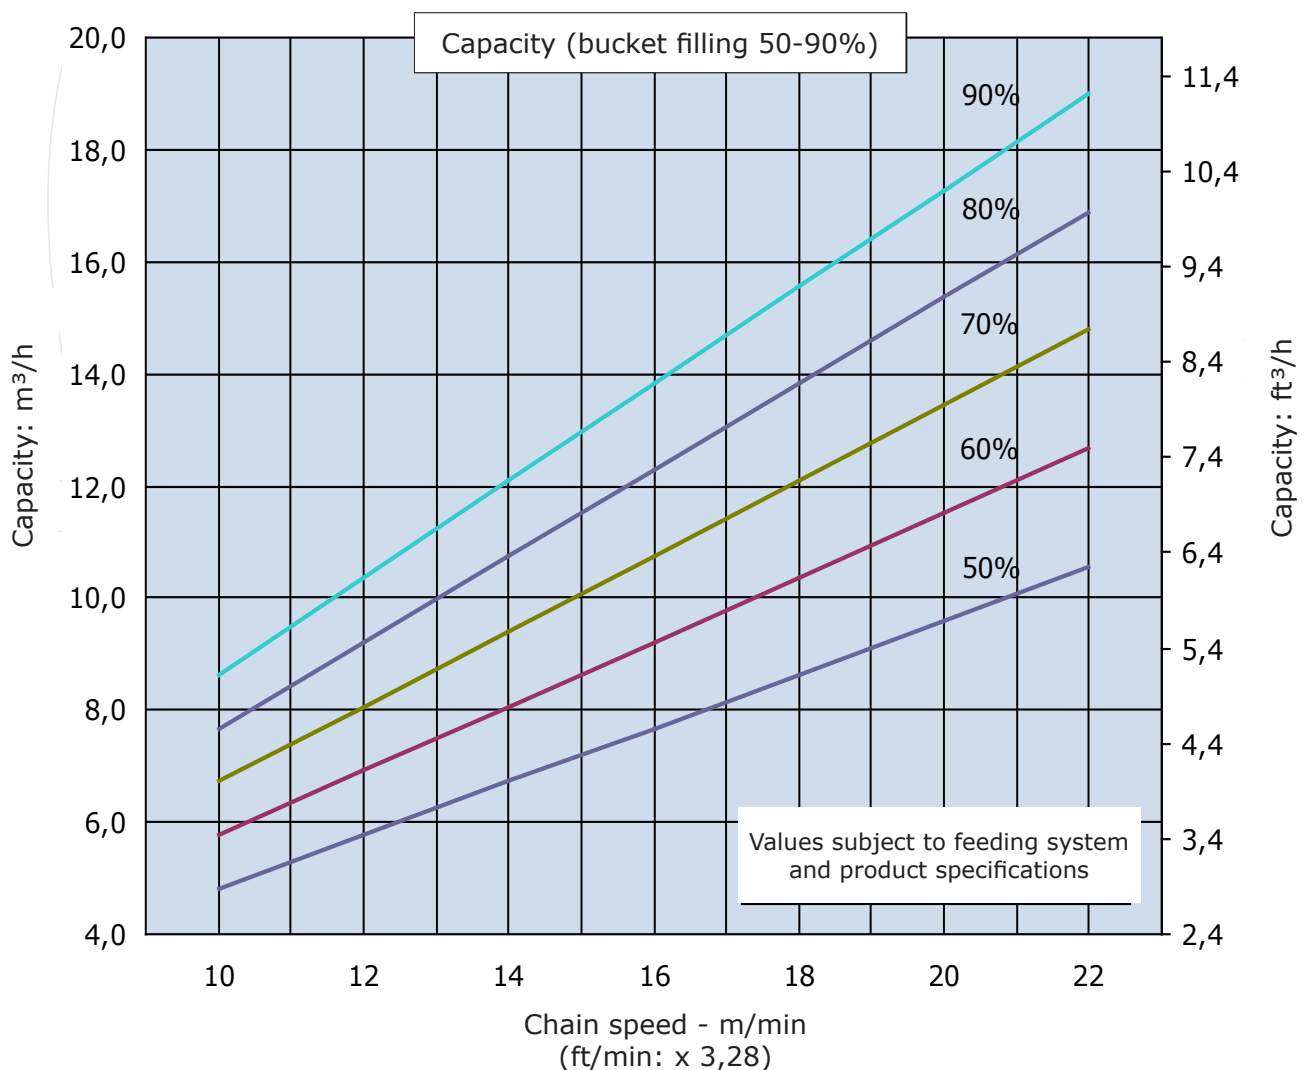


Universal Elevator Type 33E

Measurements

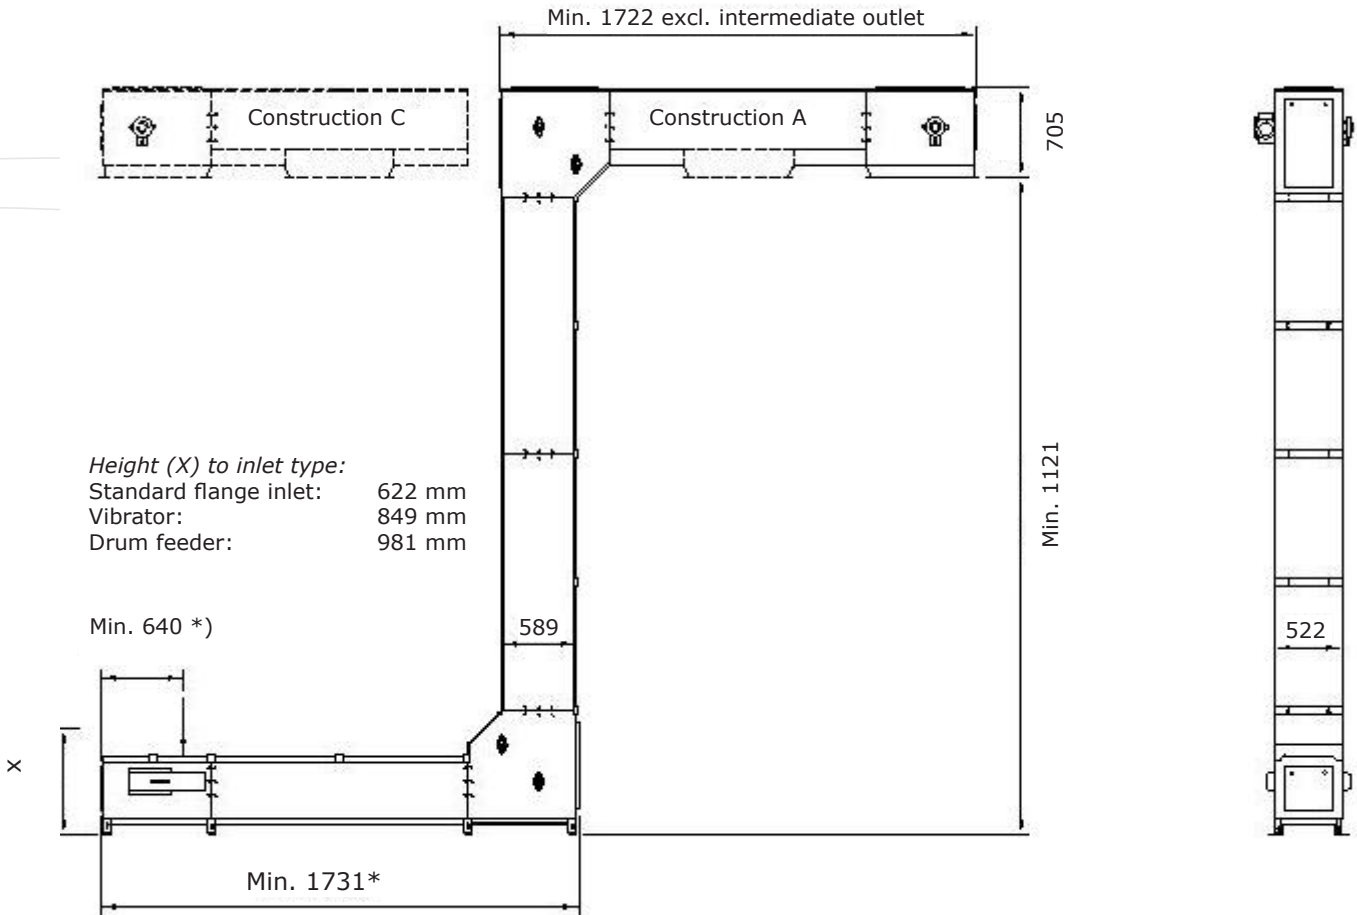


*) Depending on inlet type

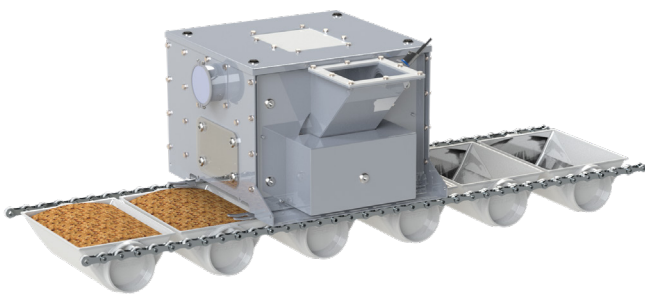

Drum feeder

Continuous Batch Feeding System
 conveying with FRB buckets without overlap
 for most free flowing products.
 Filling degree up to 95%

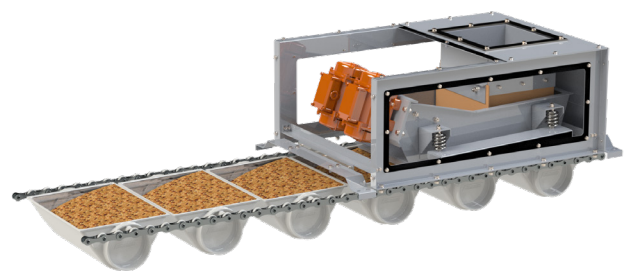

Vibrating feeder

Traditional gentle feeding system
 for most product types.
 Filling degree up to 65%

