


## Universal Elevator Type 44E

### Technical data


Applications:	Powder, granulates, pellets, grain & seeds
Execution:	Design: Closed w/inspection doors / open construction Material: Mild steel w/powder coating / stainless steel
Buckets:	Type: Standard / buckets without overlap Size: 4,4 liters Material: PP-Glass-AS / PP-Glass / stainless steel
Chains:	Material: Mild steel / stainless steel / lubrication free
Chain tension:	Automatic, pneumatically operated w/local control
Intermediate outlet(s):	Pneumatically operated
Inlet, feeding system:	Simatek Drum Feeder / Vibrating Feeder
Overload protection:	Electronic
Noise emission declaration:	Below 70 dB(A) at 1m distance, without product (Lpa re. 20μPa)

### Capacity

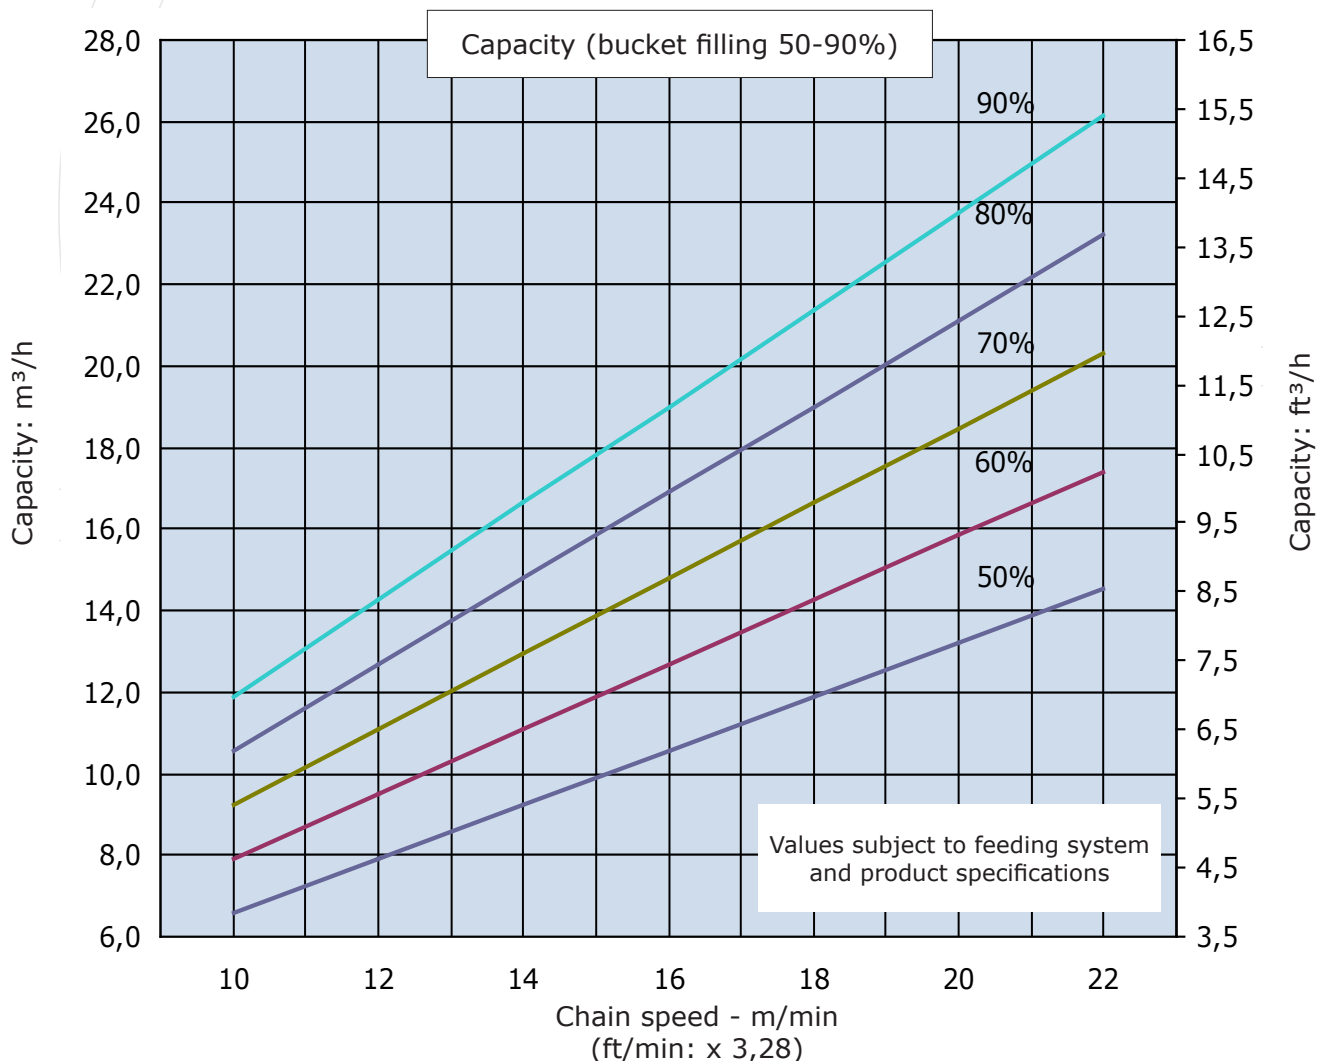


# Universal Elevator Type 44E

## Measurements

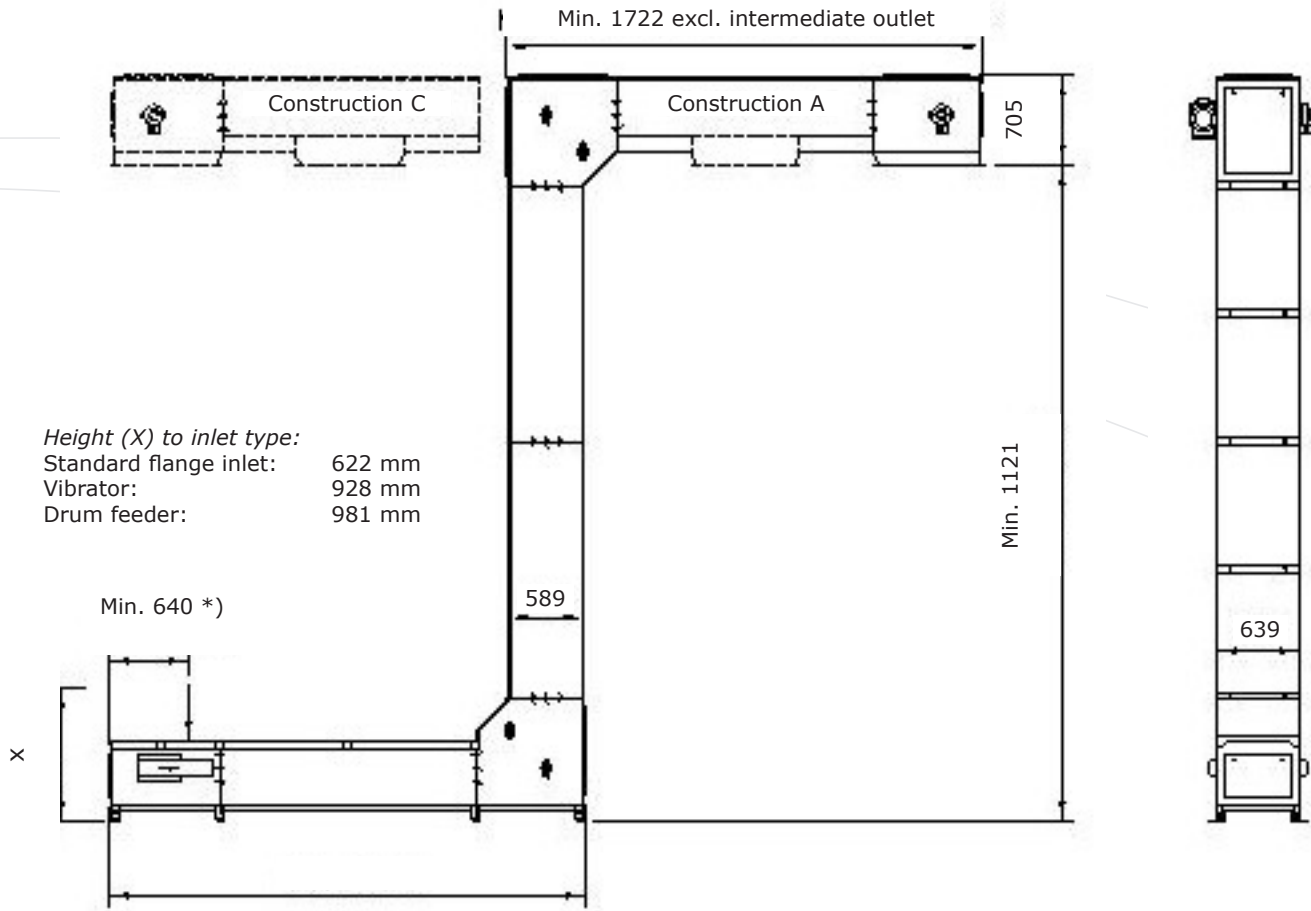


\*) Depending on inlet type

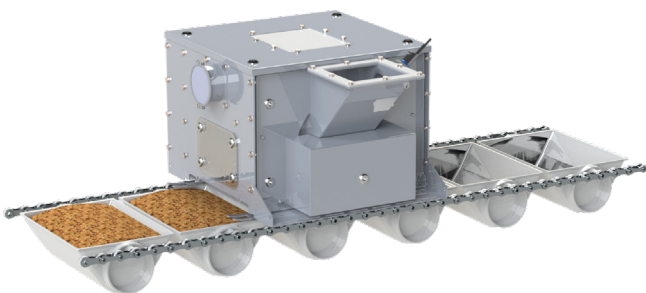

**Drum feeder**

Continuous Batch Feeding System  
 conveying with FRB buckets without overlap  
 for most free flowing products.  
 Filling degree up to 95%

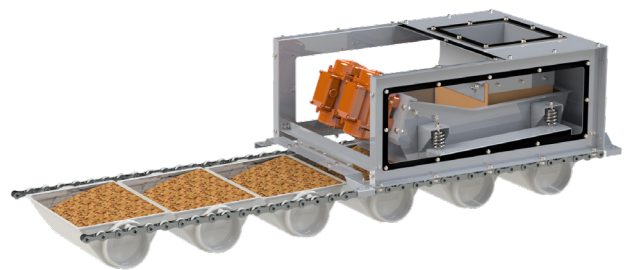

**Vibrating feeder**

Traditional gentle feeding system  
 for most product types.  
 Filling degree up to 65%

