


Universal Elevator Type 460E

Technical data



Applications:	Powders, granulates, pellets, grain & seeds
Execution:	Design: Closed w/inspection doors Material: Mild steel w/powder coating / stainless steel
Buckets:	Type: Buckets without overlap Size: 46 liters Material: Stainless steel / polycarbonate (PC)
Chains:	Material: Mild steel / stainless steel
Chain tension:	Automatic, pneumatically operated w/local control
Intermediate outlet(s):	Pneumatically operated
Inlet, feeding system:	Simatek Drum Feeder
Overload protection:	Electronic
Noise emission declaration:	Below 70 dB(A) at 1m distance, without product (Lpa re. 20μPa)

Capacity

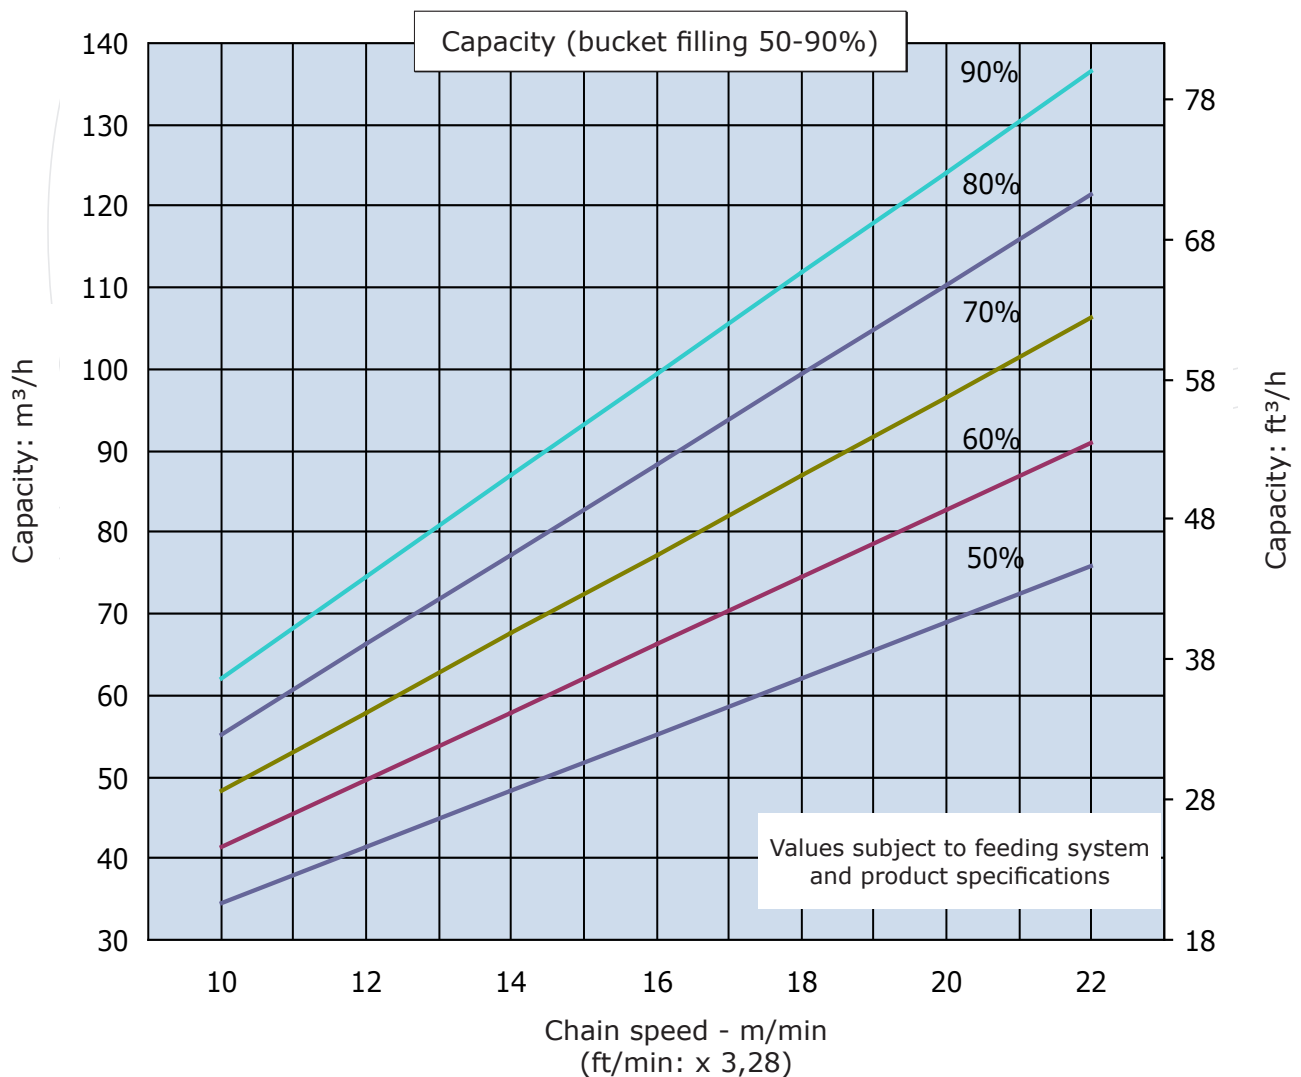

Universal Elevator Type 460E

Measurements

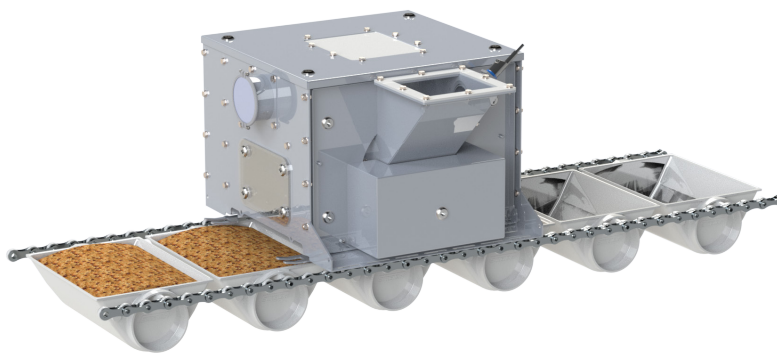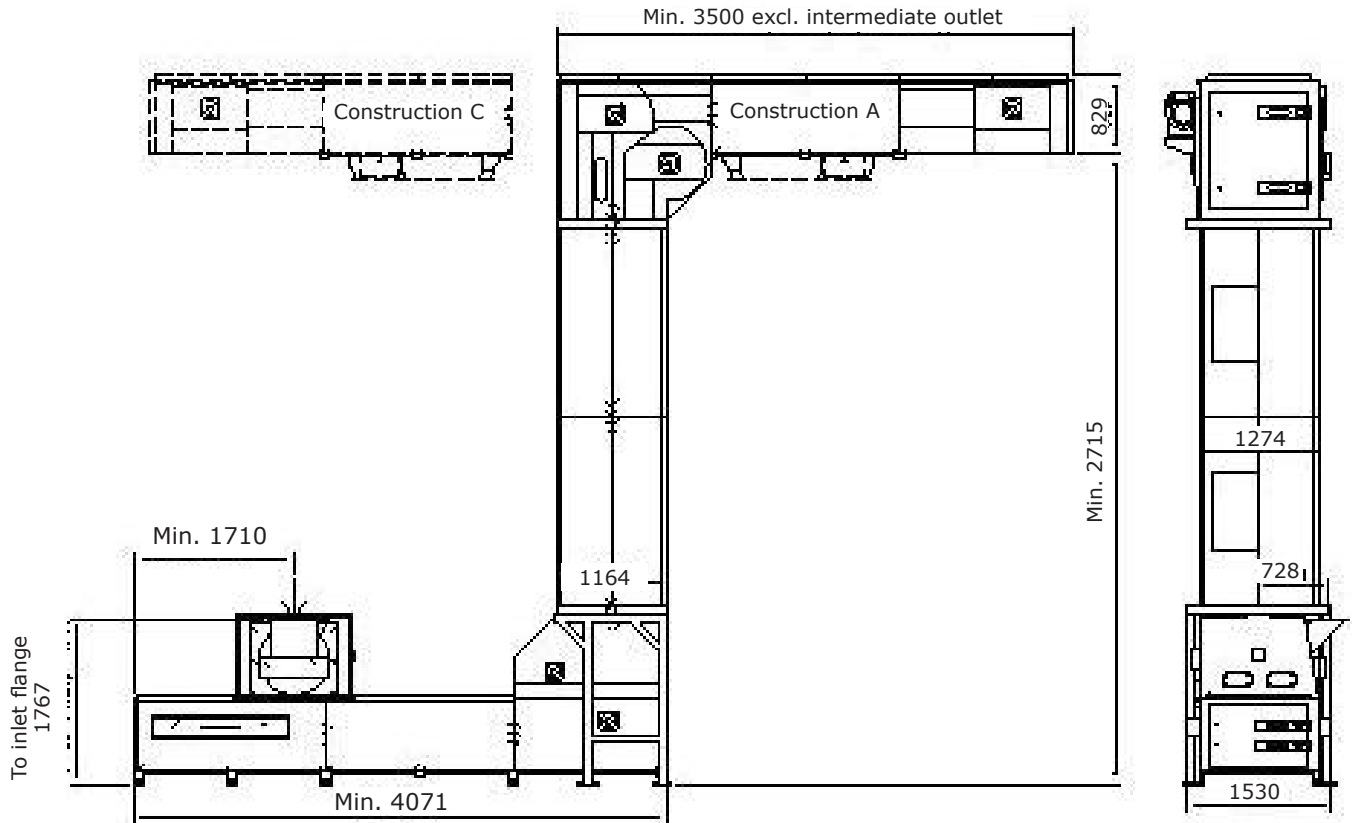

Drum feeder

Continuous Batch Feeding System
conveying with FRB buckets without overlap
for most free flowing products.

Filling degree up to 95%

